SG

Certificate No. BJ/EPA/2021/04/1003

The Manufacturer

Furen Wood Industry (Putian) Co.,Ltd. 福人木业(莆田)有限公司

No.1107 qianqin village, Dongqiao Town, Xiuyu District, Putian City (wood Processing area), Fujian Province, China 中国福建省莆田市秀屿区东峤镇前沁村前沁 1107 号(木材加工区内)

for manufacturing of Thin Medium Density Fiberboard 3mm, 4mm, 4.75mm, 5mm, 6mm, 8mm Medium Density Fiberboard 9mm, 10mm, 12mm, 15mm, 18mm, 20mm, 21mm, 22mm, 25mm has been assessed and certified by SGS-CSTC Standards Technical Services Co., Ltd. as meeting section 40 CFR 770.15, Title VI, Toxic Substances Control Act.

Certification Model: Type test + initial factory inspection + surveillance after certification

The Manufacturer demonstrates compliance of composite wood products against section, 40 CFR 770.10 for Thin Medium Density Fiberboard 3mm, 4mm, 4.75mm, 5mm, 6mm, 8mm Medium Density Fiberboard 9mm, 10mm, 12mm, 15mm, 18mm, 20mm, 21mm, 22mm, 25mm, Title VI, Toxic Substances Control Act.

> This certificate is for the composite wood products manufacturing at the production facility stated above. The production facility meet the quality assurance requirements stated in section 40 CFR 770.20-22, 40 CFR 770.24, 40 CFR 770.40 and 40 CFR 770.45, Title VI, Toxic Substances Control Act

> > This certificate is valid only if subsequent verification is conducted and the manufacturer continuously meet the requirements stated in sections, 40 CFR 770.20-22, 40 CFR 770.24, 40 CFR 770.40 and 40 CFR 770.45, Title VI, Toxic Substances Control Act

> > > This certificate (Issue1) is issued on 25 April 2021 and valid until 24 April 2023

> > > > Authorised by

Product Certification Center SGS-CSTC Standards Technical Services Co., Ltd. (CARB TPC 47) A-16F, Century Yuhul Mansion, No. 73, Fucheng Road, Beijing,China t +(86) (10)6845 6699 www.sgsgroup.com.cn





SGSSG





中国认可 产品 PRODUCT CNAS C033-P



Certificate No. BJ/CARB/2021/04/1003

The Manufacturer

Furen Wood Industry (Putian) Co.,Ltd. 福人木业(莆田)有限公司

No.1107 qianqin village, Dongqiao Town, Xiuyu District, Putian City (wood Processing area), Fujian Province, China 中国福建省莆田市秀屿区东峤镇前沁村前沁 1107 号 (木材加工区内)

for manufacturing of Thin Medium Density Fiberboard 3mm, 4mm, 4.75mm, 5mm, 6mm, 8mm Medium Density Fiberboard 9mm, 10mm, 12mm, 15mm, 18mm, 20mm, 21mm, 22mm, 25mm has been assessed and certified by SGS-CSTC Standards Technical Services Co., Ltd. as meeting section 93120.3(b), title 17, California Code of Regulations.

Certification Model: Type test + initial factory inspection + surveillance after certification

The Manufacturer demonstrates production of composite wood products complying with section 93120.2(a) Phase 2 for

Thin Medium Density Fiberboard 3mm, 4mm, 4.75mm,5mm, 6mm, 8mm Medium Density Fiberboard 9mm, 10mm, 12mm, 15mm, 18mm, 20mm, 21mm, 22mm, 25mm, title 17, California Code of Regulations.

> This certificate is for the composite wood products manufactured at the production facility stated above. The production facility meets the quality assurance requirements stated in section 93120.12, appendix 2, title 17, California Code of Regulations.

This certificate is valid only if subsequent verification is conducted and the manufacturer continues to meet the requirements stated in sections 93120.2 (a), 93120.3 (e), (f), (g), (h) and 93120.12, appendix 2, title 17, California Code of Regulations.

> This manufacturer has been certified since 25 April 2021 This certificate (Issue 1) is issued on 25 April 2021 and valid until 24 April 2023

> > Authorised by

Page

Product Certification Center SGS-CSTC Standards Technical Services Co., Ltd. (CARB TPC 47) A-16F, Century Yuhui Mansion, No. 73, Fucheng Road, Beijing,China t+(86) (10)6845 6699 www.sgsgroup.com.cn



CARB_cert templa

4 (202)







证书编号, BJ/EPA/2021/04/1003

制造商

福人木业(莆田)有限公司

中国福建省莆田市秀屿区东峤镇前沁村前沁1107号(木材加工区 内)

> 薄中密度纤维板 3mm, 4mm, 4.75mm, 5mm, 6mm, 8mm 中密度纤维板 9mm, 10mm, 12mm, 15mm, 18mm, 20mm, 21mm, 22mm, 25mm 的生产过程已通过通标标准技术服务有限公司进行的评估和认证,符合

> > 40 CFR 770.15, Title VI, Toxic Substances Control Act 规定的要求。

认证模式:型式试验+初始工厂检验+获证后监督。

制造商生产的

薄中密度纤维板 3mm, 4mm, 4.75mm, 5mm, 6mm, 8mm 中密度纤维板 9mm, 10mm, 12mm, 15mm, 18mm, 20mm, 21mm, 22mm, 25mm, 已被证明符合

40 CFR 770.10 ,Title VI, Toxic Substances Control Act. 规定的甲醛释放量的标准要求。

本证书仅适用于在上述生产场所生产的复合木制品。

该生产场所的设施设备符合 40 CFR 770.20-22, 40 CFR 770.24, 40 CFR 770.40 和 40 CFR 770.45, Title VI. Toxic Substances Control Act 的要求。

此证书只有当工厂进行了后续评审并持续满足 40 CFR 770.20-22, 40 CFR 770.24, 40 CFR 770.40 和 40 CFR 770.45, Title VI, Toxic Substances Control Act 的要求时才能持续有效。

> 此证书(版本1) 颁发日期: 2021年04月25日 有效期至: 2023年04月24日

签署

Page

产品认证中心 通标标准技术服务有限公司(CARB TPC 47) 海淀区阜成路73号世纪裕惠大厦A座16层,北京,中国 t +(86) (10)6845 6699 www.sgsgroup.com.cn









PRODUCT CNAS C033-P

EPA-WP-08-F01(C)

SGSS





No.: GZHL2302003312HI

Date: Mar 03, 2023

Page 1 of 4

FUREN WOOD INDUSTRY (PUTIAN) CO., LTD NO.1107 QIANQIN VILLAGE, DONGQIAO TOWN, XIUYU DISTRICT, PUTIAN CITY (WOOD PROCESSING AREA)

Product Type	: MDF (without surface finishes or seals)	
Thickness	: 25mm	
Visit Number	: Y2Q4	
Job Number	: BJGZ20B1043	
Product Line Information	: ONE LINE	
Tested Sample Information	: Lot No.: C221201	Production Date: 2022.12.1
Sample Wrapping Method	: Wrapped Collectively in Vapor Retarder	

As above test item and its relevant information regarding to the submission are provided and confirmed by the applicant. SGS is not liable to either the test item or its relevant information, in terms of the accuracy, suitability, reliability or/and integrity accordingly.

SGS Ref No.	: CAN23-0002752
Sample Receiving Date	: Feb 16, 2023
Test Performing Date	: Feb 16, 2023 to Mar 03, 2023
Test Performed	: Selected test(s) as requested by applicant
Test Result(s)	: For further details, please refer to the following page(s)

	Test Requirement	Conclusion
1	Final Regulation Order – Airborne Toxic Control Measure to Reduce Formaldehyde Emissions from Composite Wood Product (CARB ATCM), title 17, California Code of Regulation, section 93120.2 (a) and US EPA 40 CFR Part 770.10, Toxic Substances Control Act (TSCA) Title VI – Formaldehyde Emission Test for Composite Wood Products	Pass

Signed for and on behalf of SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch



Joe Lu Authorized Signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>https://www.ags.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excent aparties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_DoccheckBags.com

No. 198, Kushu Road, Science City, Economic & Technological Development Area, Guangshou, Guangstong, China 510663

中国・广东・广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn 1 (86-20) 82155555 sgs.china@sgs.com



No.: GZHL2302003312HI

Description

Brown MDF

Page 2 of 4

Test Result(s):

Test Part Description:

SN ID Sample No. SN1 A1

SGS Sample ID CAN23-0002752-0001.C001

Remarks:

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

Final Regulation Order – Airborne Toxic Control Measure to Reduce Formaldehyde Emissions from Composite Wood Product (CARB ATCM), title 17, California Code of Regulation, section 93120.2 (a) and US EPA 40 CFR Part 770.10, Toxic Substances Control Act (TSCA) Title VI – Formaldehyde Emission Test for Composite Wood Products

Test Method:	With reference to ASTM D6007-14 and Standard Face and Back Configuration testing
	therein, analysis was performed by UV-Vis.

<u>Test Item(s)</u> Sample Conditioning / Parameters	<u>Limit</u>	<u>Unit(s)</u>	<u>MDL</u>	<u>A1</u>
Average Temperature	-	°C	-	23.5
Average Relative Humidity	-	%	-	49.4
Range of Temperature	-	°C	-	21.0-27.0
Range of Relative Humidity	-	%	-	45.0-55.0
Sampling Time	-	h	-	168
Formaldehyde Background	-	ppm	-	<0.10
Sample Details and Apparatus				
Chamber Dimensions(Nominal)	-	m	-	1.6x0.8x0. 8
Chamber Volume	-	m³	-	1.0
Chamber Load Ratio	-	m²/m³	-	0.3937
Chamber Q/A Ratio(±2%)	-	-	-	1.905
Sample Size	-	cm	-	25.6x25.6
Number of Samples	-	-	-	3
Number of Exposed Surfaces	-	-	-	6
Sampling Parameters of Emission Test				
Average Temperature	-	°C	-	24.9
Average Relative Humidity	-	%	-	50.3
Range of Temperature	-	°C	-	24.0-26.0
Range of Relative Humidity	-	%	-	46.0-54.0
Air-samplingTime	-	min	-	30
Sampling Time in Chamber	-	min	-	240
Air-sampling Rate	-	L/min	-	1.0
Formaldehyde Emission Results				
Background of Trial 1	-	ppm	0.01	ND
Background of Trial 2	-	ppm	0.01	ND
Background of Trial 3	-	ppm	0.01	ND



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>https://www.ags.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction force were/sing all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_DoccheckBass.com

No. 198, Kashu Ruad, Science City, Economic & Technological Development Area, Guangshou, Guangshong, China 510663 t (86-20) 82155555 www.sgsgroup.com.cn t (86-20) 82155555 sgs.china@sgs.com 中国・广东・广州高新技术产业开发区科学城科珠路198号 邮编: 510663

Member of the SGS Group (SGS SA)



No.: GZHL2302003312HI

Date: Mar 03, 2023

Test Item(s)	<u>Limit</u>	<u>Unit(s)</u>	MDL	<u>A1</u>
Formaldehyde Emission of Trial 1	-	ppm	0.01	0.05
Formaldehyde Emission of Trial 2	-	ppm	0.01	0.05
Formaldehyde Emission of Trial 3	-	ppm	0.01	0.05
Formaldehyde Emission (Corrected) of Trial 1	-	ppm	0.01	0.05
Formaldehyde Emission (Corrected) of Trial 2	-	ppm	0.01	0.05
Formaldehyde Emission (Corrected) of Trial 3	-	ppm	0.01	0.05
Formaldehyde Emission (Corrected) of Average	0.11	ppm	0.01	0.05
Conclusion				Pass

Notes:

(1) ppm = parts of formaldehyde per million parts air

(2) Formaldehyde Emission (Corrected) is Formaldehyde concentration corrected to 25°C and 50% Relative Humidity.

(3) The scope of CARB ATCM / TSCA Title VI is/are applicable for composite wood, but not for other wood products.

(4) Formaldehyde emission test is one of the conformity criteria under CARB ATCM / TSCA Title VI. Full conformity of a composite wood product happens provided that this composite wood fulfill all the requirement as stated in CARB ATCM title 17 section 93120 to 93120.12 / US EPA 40 CFR Part 770.10.

Reference Limit:

Maximum Permissible Limit according to CARB ATCM, Title 17, California Code of Regulation, Section 93120.2 (a):

Formaldehyde Emission Standards for Hardwood Plywood(HWPW), Particleboard(PB), and Medium Density Fiberboard(MDF)		
Туре	Limits	
HWPW	0.05 ppm	
PB	0.09 ppm	
MDF	0.11 ppm	
Thin MDF	0.13 ppm	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>https://www.sgs.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excenerate parties to a transaction force were company. Any under the transaction documents. This document connot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Ooccheck@sgs.com

No. 198, Kashu Road, Science City, Economic & Technological Development Area, Guangshou, Guangstong, China 510683 中国・广东・广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn 1 (86-20) 82155555 sgs.china@sgs.com



No.: GZHL2302003312HI

Date: Mar 03, 2023


Page 4 of 4

Maximum Permissible Limit according to TSCA Title VI, US EPA 40 CFR Part 770.10, Code of Federal **Regulations:**

Formaldehyde Emission Standards for Hardwood Plywood(HWPW), Particleboard(PB), and Medium Density Fiberboard(MDF)		
Туре	Limits	
HWPW	0.05 ppm	
PB	0.09 ppm	
MDF	0.11 ppm	
Thin MDF	0.13 ppm	

Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule (w=0) stated in ILAC-G8:09/2019.

Sample Photo:

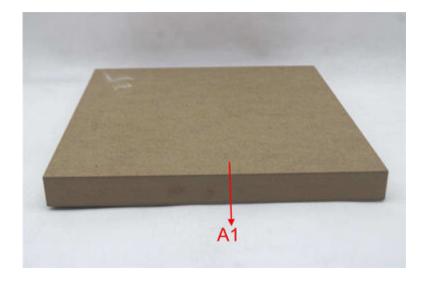

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>https://www.ags.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excenerate parties to a transaction foron exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unsuthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Ooccheck@ags.com

No. 198, Kashu Road, Science City, Economic & Technological Development Area, Guangshou, Guangstong, China 510683 中国・广东・广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn 1 (86-20) 82155555 sgs.china@sgs.com