

Product Data Sheet

AkzoNobel Powder Coatings

Interpon 700

Production Code: EN2980

Product Description

Interpon 700 is a series of epoxy/polyester hybrid powder coatings offering stable color and heat stability whilst maintaining an optimum combination of decorative and protective qualities.

Interpon 700 powders are available in the full range of colours in gloss, reduced gloss, textured, aluminum and other special finishes or can be custom matched to the user's requirements and can be custom matched to the user's requirements.

Powder Properties

Chemical type	Epoxy/ Polyester
Appearance	Black
Particle Size	Suitable for electrostatic spray
Gloss	Matt
Specific gravity	1.2-1.8 g/cm ³ (depending on color)
Storage	Dry cool conditions below 30°C
Shelf life	6 months (<30°C), 12 months (<25°C)
Stoving schedule (object temperature)	15-20 minutes at 190°C
	Failure to observe the correct curing conditions may cause difference in colour, gloss and the deterioration of the coating properties.

Test Conditions

The results shown below are based on mechanical and chemical tests which (unless otherwise indicated) have been carried out under laboratory conditions and are given for guidance only. Actual product performance will depend upon the circumstances under which the product is used.

Substrate	Mechanical tests: 0.6mm degreased steel
Pretreatment	Chemical and durability tests: Q-Al panel (A-36) Corrosion tests: Standard Zn-phosphating panel (GARDOBOND) or 0.6mm silane Q-Fe panel (R-36)
Film Thickness	60-80 microns
Stoving Schedule	15 minutes at 190°C (object temperature)

Mechanical Tests

Flexibility	ISO 1519	Pass 4mm
	GB/T 6742	Pass 4mm
Adhesion	ASTM D3359	5B
	ISO 2409	Gt 0
	GB/T 9286	Gt 0
Erichsen Cupping	ISO 1520	Pass >6mm
	GB/T 9753	Pass >6mm
Impact (direct)	ASTM D2794	>=30kg·cm
	GB/T 1732	30kg·cm
Pencil hardness*	ASTM D3363	>=H
	GB/T 6739	>=H

*The pencil used in hardness test is Mitsubishi pencil

Chemical and Durability Tests

Humidity	ASTM D1735	Pass-1000 hours, no blistering or loss of gloss
Distilled Water Immersion	ASTM D870	Pass-240 hours, no blistering or loss of gloss
Exterior Durability		Some chalking after 6-12 months continuous outdoor exposure but less

Interpon 700

	Chemical Resistance	than pure epoxies. Protective properties not impaired Generally good resistance to most acids, alkalis and oils at ambient temperatures
Corrosion Tests**	Neutral Salt Spray ISO 9227 (Standard Zn-phosphating) Neutral Salt Spray ISO 9227 (Silane pretreatment)	Pass-800 hours, creep less than 2mm from scribe Pass-500 hours, creep less than 2mm from scribe
	<i>**Actual corrosion resistance is determined by substrate type, pretreatment effect, coating type and coating process and so on.</i>	
Pre-treatment	Aluminum, steel or Zintec surfaces to be coated must be clean and free from grease. Silane, ceramic, iron phosphate or lightweight zinc phosphate of ferrous metals improves corrosion resistance. Aluminum substrates may require a chromate conversion coating or chromium free passivation film.	
Application	Interpon 700 powders can be applied by manual or automatic electrostatic spray equipment, however for consistency of finish automatic equipment is preferred. Unused powder can be reclaimed using suitable equipment and recycled through the coating system.	
	Fluidizing air pressure Transport air pressure Recommended voltage	~0.7bar ~0.7bar 40-90kV
Damage Repair	Surface preparation Application	Sanding + Air cleaning Recoat: Lower Voltage
Safety Precautions	When using, do not eat, drink or smoke. Do not breathe the dust. In case of insufficient ventilation wear suitable respiratory equipment. For further information please refer to the specific product Material Safety Data Sheet (MSDS) available on request from your local AkzoNobel sales office.	
Disclaimer	IMPORTANT NOTE: The information in this data sheet is not intended to be exhaustive and is based on the present state of our knowledge and on current laws: any person using the product for any purpose other than that specifically recommended in the technical data sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at his own risk. It is always the responsibility of the user to take all necessary steps to fulfill the demands set out in the local rules and legislation. Always read the Material Data Sheet and the Technical Data Sheet for this product if available. All advice we give or any statement made about the product by us (whether in this data sheet or otherwise) is correct to the best of our knowledge but we have no control over the quality or the condition of the substrate or the many factors affecting the use and application of the product. Therefore, unless we specifically agree in writing otherwise, we do not accept any liability whatsoever for the performance of the product or for any loss or damage arising out of the use of the product. All products supplied and technical advices given are subject to our standard terms and conditions of sale. You should request a copy of this document and review it carefully. The information contained in this data sheet is subject to modification from time to time in the light of experience and our policy of continuous development. It is the user's responsibility to verify that this data sheet is current prior to using the product. Brand names mentioned in this data sheet are trademarks of or are licensed to AkzoNobel	

AkzoNobel (china) Investment Co., Ltd
22F, No.1788, West Nanjing Road, Jing'an District, Shanghai Tel: (86) 021 22205000
AkzoNobel Performance Coatings (Changzhou) Co., Ltd
No.1 Chunping Road, Binjiang Chemical Industrial Park, New District, Changzhou. Tel: (86) 0519 81065000
AkzoNobel Chang Cheng Coatings (Guangdong) Co., Ltd
Luotian Avenue, Songgang Town, Shenzhen. Tel: (86) 0755 27148450 Fax: (86) 0755 29936451
AkzoNobel Powder Coating (LangFang) Co., Ltd
No.32 Quanxing Road, LangFang Economic Development Area, Langfang. Tel: (86) 0316 5919519 Fax: (86) 0316 5919516
AkzoNobel Powder Coating (ChengDu) Co., Ltd
Checheng Road, East 4th, No.399, Longquanyi District, Chengdu. Tel: (86) 028 65708888 Fax: (86) 028 65708866
AkzoNobel Powder Coating (WuHan) Co., Ltd
No.89 Xinghua Road, Wuhan Economic Development Area, Wuhan. Tel: (86) 027 84256801 Fax: (86) 027 83564473

<http://www.interpon.com>

Copyright © 2021 Akzo Nobel Powder Coatings Ltd. Interpon is a registered trademark of AkzoNobel
Interpon 700 - Issue 4
Issued: 2014/11/1 Revision Date: 2021/12/13

Interpon®

Test Report

No.: CANEC24014491344

Date: Jul 09, 2024

Page 1 of 8

Client Name: AKZO NOBEL(CHINA) INVESTMENT CO.,LTD

Client Address: 22F,NO. 1788, WEST NANJING ROAD,JING'AN DISTRICT, SHANGHAI P.R.CHINA

Sample Name: Interpon 700

The above sample(s) and information were provided by the client.

SGS Job No.: SZP24-029247
 Sample Receiving Date: Jul 04, 2024
 Testing Period: Jul 04, 2024 ~ Jul 09, 2024
 Test Requested: Select test(s) as requested by the client.
 Test Method(s): Please refer to next page(s).
 Test Result(s): Please refer to next page(s).

Test Requirement	Conclusion
EU RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU - Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBB), Polybrominated diphenyl ethers (PBDE), Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) and Diisobutyl phthalate (DIBP)	Pass

Signed for and on behalf of
 SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Kelly Qu 屈桃李
 Approved Signatory

scan to see the report



78365692

This report is English version of CANEC24014491320. In case of any discrepancy, the Chinese version shall prevail. 本测试报告是 CANEC24014491320 的英文版本。中英文版本如有歧异，以中文版为准。



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Guangzhou Branch / SGS-CSTC Standards Technical Laboratory

No.198, Kezhu Road, Science City Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
 中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
 t (86-20) 82155555 sgs.china@sgs.com

Test Result(s):

Test Part Description:

SN ID	Sample No.	SGS Sample ID	Description
SN1	A20	CAN24-0144913-0001.C020	White powder

Remarks:

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

EU RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU - Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBB), Polybrominated diphenyl ethers (PBDE), Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) and Diisobutyl phthalate (DIBP)

Test Method: With reference to IEC 62321-4:2013+AMD1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analysis was performed by ICP-OES/AAS, UV-Vis and GC-MS.

Test Item(s)	Limit	Unit(s)	MDL	A20
Lead (Pb)	1000	mg/kg	2	12
Mercury (Hg)	1000	mg/kg	2	ND
Cadmium (Cd)	100	mg/kg	2	ND
Hexavalent Chromium (Cr(VI))	1000	mg/kg	8	ND
Polybromobiphenyl (PBB)	1000	mg/kg	-	ND
Monobrominated biphenyl (MonoBB)	-	mg/kg	5	ND
Dibrominated biphenyl (DiBB)	-	mg/kg	5	ND
Tribrominated biphenyl (TriBB)	-	mg/kg	5	ND
Tetrabrominated biphenyl (TetraBB)	-	mg/kg	5	ND
Pentabrominated biphenyl (PentaBB)	-	mg/kg	5	ND
Hexabrominated biphenyl (HexaBB)	-	mg/kg	5	ND
Heptabrominated biphenyl (HeptaBB)	-	mg/kg	5	ND
Octabrominated biphenyl (OctaBB)	-	mg/kg	5	ND
Nonabrominated biphenyl (NonaBB)	-	mg/kg	5	ND
Decabrominated biphenyl (DecaBB)	-	mg/kg	5	ND
Polybromodiphenyl ether (PBDE)	1000	mg/kg	-	ND
Monobrominated diphenyl ether (MonoBDE)	-	mg/kg	5	ND
Dibrominated diphenyl ether (DiBDE)	-	mg/kg	5	ND
Tribrominated diphenyl ether (TriBDE)	-	mg/kg	5	ND
Tetrabrominated diphenyl ether (TetraBDE)	-	mg/kg	5	ND
Pentabrominated diphenyl ether (PentaBDE)	-	mg/kg	5	ND
Hexabrominated diphenyl ether (HexaBDE)	-	mg/kg	5	ND
Heptabrominated diphenyl ether (HeptaBDE)	-	mg/kg	5	ND



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Report

No.: CANEC24014491344

Date: Jul 09, 2024

Page 3 of 8

Test Item(s)	Limit	Unit(s)	MDL	A20
Octabrominated diphenyl ether (OctaBDE)	-	mg/kg	5	ND
Nonabrominated diphenyl ether (NonaBDE)	-	mg/kg	5	ND
Decabrominated diphenyl ether (DecaBDE)	-	mg/kg	5	ND
Bis(2-ethylhexyl) phthalate (DEHP)	1000	mg/kg	50	ND
Butyl benzyl phthalate (BBP)	1000	mg/kg	50	ND
Dibutyl phthalate (DBP)	1000	mg/kg	50	ND
Diisobutyl phthalate (DIBP)	1000	mg/kg	50	ND

Notes:

- (1) The maximum permissible limit is quoted from RoHS Directive (EU) 2015/863.
- (2) IEC 62321 series is equivalent to EN 62321 series.
- (3) The restriction of DEHP, BBP, DBP and DIBP shall apply to medical devices, including in vitro medical devices, and monitoring and control instruments, including industrial monitoring and control instruments, from 22 July 2021.

Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule (w=0) stated in ILAC-G8:09/2019.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
 Guangzhou Branch Technical Services Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
 中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663


t (86-20) 82155555 www.sgsgroup.com.cn
 t (86-20) 82155555 sgs.china@sgs.com

Elements Testing Flow Chart

These samples were dissolved totally by pre-conditioning method according to below flow chart.

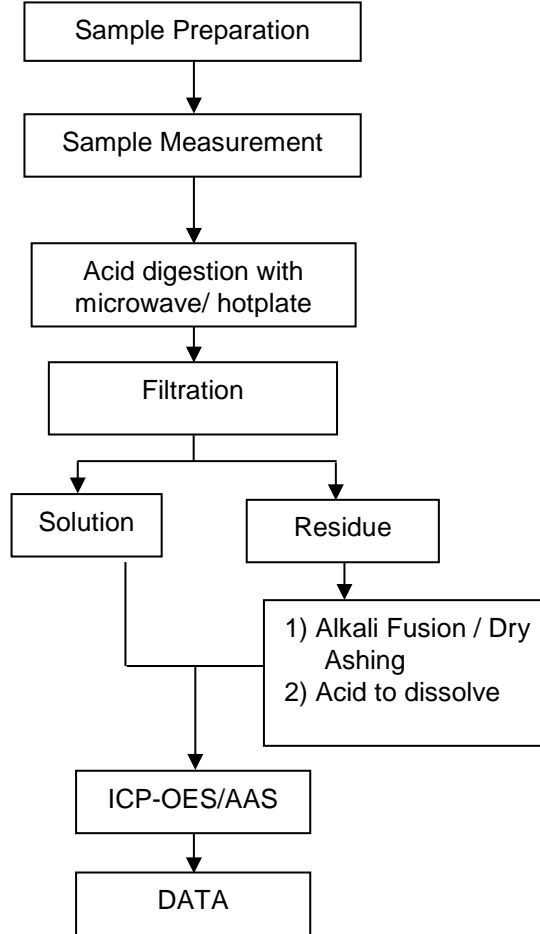


Hexavalent Chromium (Cr(VI)) Testing Flow Chart

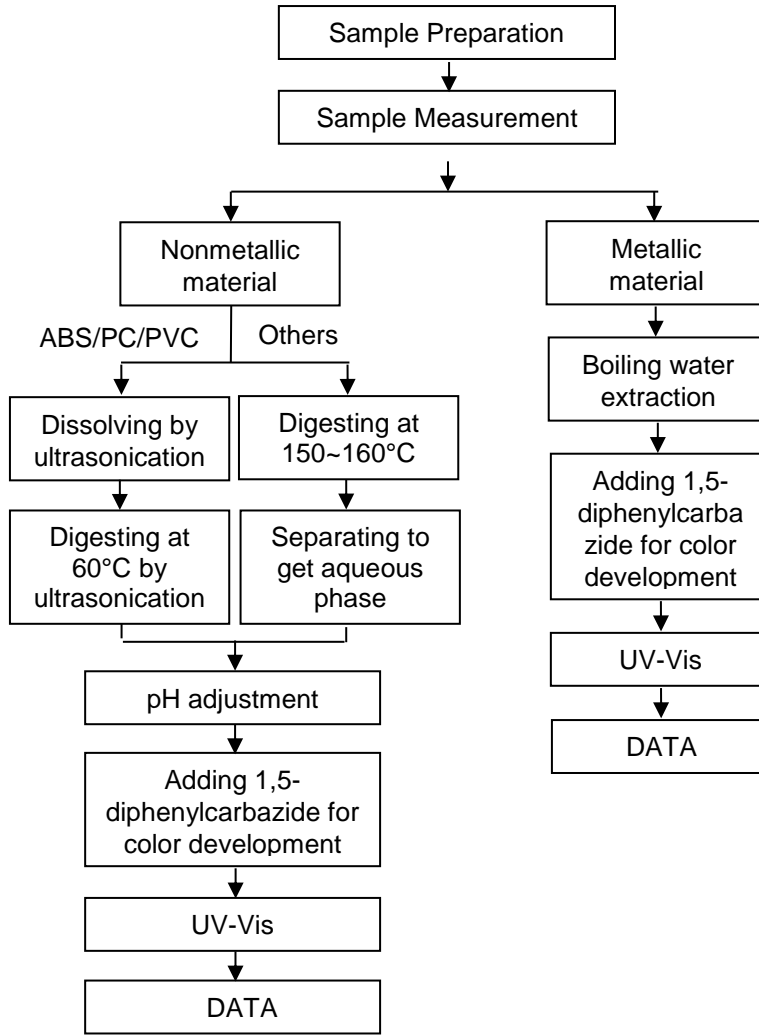


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

PBB/PBDE Testing Flow Chart

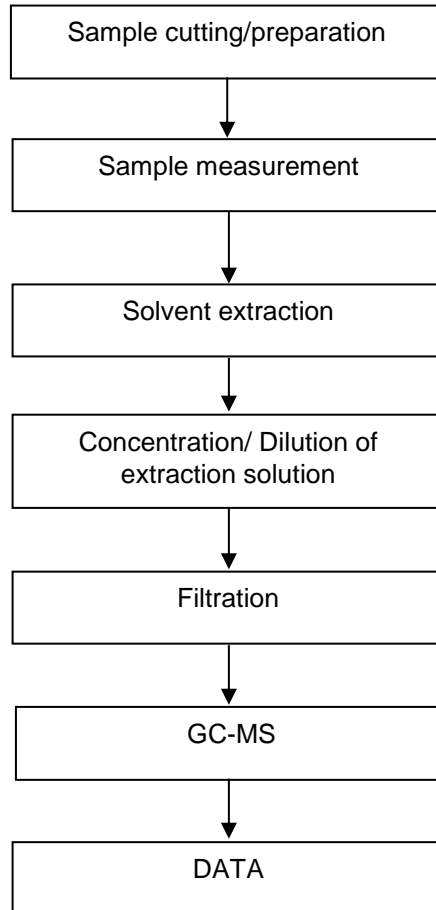

Phthalates Testing Flow Chart

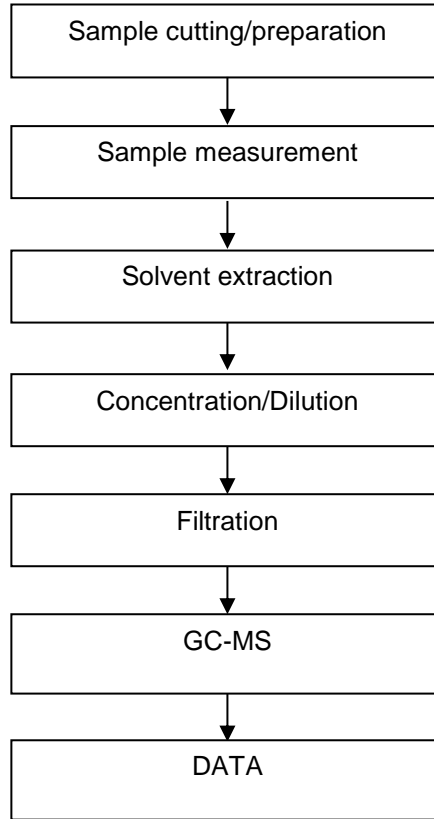

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Report

No.: CANEC24014491344

Date: Jul 09, 2024

Page 8 of 8

Sample Photo:



SGS authenticate the photo on original report only
*** End of Report ***



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Technical Services Center Chemical Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

SAFETY DATA SHEET

INTERPON 700 BLACK

Safety Data Sheet according to GB/T 16483-2008 and GB/T 17519-2013

Section 1. Identification

Product identifier : INTERPON 700 BLACK
SDS code : EN298O

Relevant identified uses of the substance or mixture and uses advised against

Identified uses
Professional use Industrial use

Uses advised against
All other uses

Product use : Powder paint.

Supplier's details

AkzoNobel Powder Coatings (LangFang) Co.,Ltd.
 No. 32 Quanxing Road, Economic&Technical Dev.
 Zone
 Langfang City, Hebei Province, 065001 China
 Tel: (86) 316 5919519 Fax: (86) 316 5919516

e-mail address : SDSPSRACN@akzonobel.com

Emergency telephone number (with hours of operation) : +86 532 83889090 (24 hour) – For Mandarin only

Section 2. Hazards identification

Classification of the substance or mixture according to GB 13690-2009 and GB 30000-2013

Emergency overview

Solid. [Powder.]
 May form combustible dust concentrations in air.

See Section 12 for environmental precautions.

Classification of the substance or mixture : Not classified.

GHS label elements

Signal word : No signal word.
Hazard statements : No known significant effects or critical hazards.

Precautionary statements

Prevention : Not applicable.
Response : Not applicable.

Date of issue/Date of revision : 28-2-2024 **Version** : 2
Date of previous issue : 31-8-2023 1/10

Section 2. Hazards identification

Storage : Not applicable.

Disposal : Not applicable.

Physical and chemical hazards : May form combustible dust concentrations in air.

Health hazards : No known significant effects or critical hazards.

Environmental hazards : No known significant effects or critical hazards.

Other hazards which do not result in classification : May form combustible dust concentrations in air.

Section 3. Composition/information on ingredients

Substance/mixture : Mixture

There are no ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact : Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses if easy to do. Get medical attention if irritation occurs.

Inhalation : Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if symptoms occur.

Skin contact : Flush contaminated skin with plenty of water. Remove contaminated clothing and shoes. Get medical attention if symptoms occur.

Ingestion : Wash out mouth with water. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Do not induce vomiting unless directed to do so by medical personnel. Get medical attention if symptoms occur.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact : Exposure to airborne concentrations above statutory or recommended exposure limits may cause irritation of the eyes.

Inhalation : Exposure to airborne concentrations above statutory or recommended exposure limits may cause irritation of the nose, throat and lungs.

Skin contact : No known significant effects or critical hazards.

Ingestion : No known significant effects or critical hazards.

Over-exposure signs/symptoms

Eye contact : Adverse symptoms may include the following:
irritation
redness

Inhalation : Adverse symptoms may include the following:
respiratory tract irritation
coughing

Skin contact : No specific data.

Section 4. First aid measures

Ingestion : No specific data.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician : Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

Specific treatments : No specific treatment.

Protection of first-aiders : No action shall be taken involving any personal risk or without suitable training.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media : Use dry chemical powder.

Unsuitable extinguishing media : Avoid high pressure media which could cause the formation of a potentially explosible dust-air mixture.

Specific hazards arising from the chemical : May form explosible dust-air mixture if dispersed.

Hazardous thermal decomposition products : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
sulfur oxides
metal oxide/oxides

Special protective actions for fire-fighters : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Special protective equipment for fire-fighters : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing dust. Put on appropriate personal protective equipment.

For emergency responders : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".

Environmental precautions : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

Small spill : Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Vacuum or sweep up material and place in a designated, labeled waste container. Dispose of via a licensed waste disposal contractor.

Section 6. Accidental release measures

- Large spill** : Move containers from spill area. Use spark-proof tools and explosion-proof equipment. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Vacuum or sweep up material and place in a designated, labeled waste container. Avoid creating dusty conditions and prevent wind dispersal. Dispose of via a licensed waste disposal contractor. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Avoid breathing dust. Avoid the creation of dust when handling and avoid all possible sources of ignition (spark or flame). Prevent dust accumulation. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Electrical equipment and lighting should be protected to appropriate standards to prevent dust coming into contact with hot surfaces, sparks or other ignition sources. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before transferring material.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

- Conditions for safe storage, including any incompatibilities** : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination. See Section 10 for incompatible materials before handling or use.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

None.

- Appropriate engineering controls** : Use only with adequate ventilation. If user operations generate dust, fumes, gas, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

Individual protection measures

- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Section 8. Exposure controls/personal protection

- Eye/face protection** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: safety glasses with side-shields. If operating conditions cause high dust concentrations to be produced, use dust goggles.
- Skin protection**
- Hand protection** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
- Body protection** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Other skin protection** : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory protection** : Based on the hazard and potential for exposure, select a respirator that meets the appropriate standard or certification. Respirators must be used according to a respiratory protection program to ensure proper fitting, training, and other important aspects of use. Wear a respirator conforming to EN140 with type A/P2 filter or better.
Dry sanding, flame cutting and/or welding of the dry paint film will give rise to dust and/or hazardous fumes. Wet sanding/flattening should be used wherever possible. If exposure cannot be avoided by the provision of local exhaust ventilation, suitable respiratory protective equipment should be used.

Section 9. Physical and chemical properties and safety characteristics

The conditions of measurement of all properties are at standard temperature and pressure unless otherwise indicated.

Appearance

- Physical state** : Solid. [Powder.]
- Color** : Black.
- Odor** : Odorless.
- Odor threshold** : Not available.
- pH** : Not applicable. [DIN EN 1262]
- Melting point/freezing point** : Not available.
- Flammability** : Not available.
- Lower and upper explosion limit** : 20 - 70 g/m³
- Vapor pressure** : Not available.
- Relative vapor density** : Not applicable.
- Relative density** : 1.2 to 1.9 [ISO 8130-2/-3]
- Solubility in water** : Not available.
- Partition coefficient: n-octanol/water** : Not applicable.
- Auto-ignition temperature** : 450 to 600°C (842 to 1112°F)
- Decomposition temperature** : Not available.
- Minimum ignition energy (mJ)** : 5 to 20
- Viscosity** : Kinematic (room temperature): Not applicable. [DIN EN ISO 3219]
Kinematic (40°C (104°F)): Not applicable. [DIN EN ISO 3219]

Particle characteristics

Date of issue/Date of revision : 28-2-2024 **Version** : 2

Date of previous issue : 31-8-2023 5/10

Section 9. Physical and chemical properties and safety characteristics

Median particle size : Not available.

* typical value, figure may vary with colour, etc

Section 10. Stability and reactivity

Reactivity : No specific test data related to reactivity available for this product or its ingredients.

Chemical stability : The product is stable.

Possibility of hazardous reactions : Under normal conditions of storage and use, hazardous reactions will not occur.

Conditions to avoid : Avoid the creation of dust when handling and avoid all possible sources of ignition (spark or flame). Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before transferring material. Prevent dust accumulation.

Incompatible materials : Reactive or incompatible with the following materials:
oxidizing materials

Hazardous decomposition products : Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Not available.

Irritation/Corrosion

Not available.

Sensitization

Not available.

Mutagenicity

Not available.

Carcinogenicity

Not available.

Reproductive toxicity

Not available.

Teratogenicity

Not available.

Specific target organ toxicity (single exposure)

Not available.

Specific target organ toxicity (repeated exposure)

Not available.

Aspiration hazard

Not available.

Section 11. Toxicological information

Information on the likely routes of exposure : Not available.

Potential acute health effects

- Eye contact** : Exposure to airborne concentrations above statutory or recommended exposure limits may cause irritation of the eyes.
- Inhalation** : Exposure to airborne concentrations above statutory or recommended exposure limits may cause irritation of the nose, throat and lungs.
- Skin contact** : No known significant effects or critical hazards.
- Ingestion** : No known significant effects or critical hazards.

Symptoms related to the physical, chemical and toxicological characteristics

- Eye contact** : Adverse symptoms may include the following:
irritation
redness
- Inhalation** : Adverse symptoms may include the following:
respiratory tract irritation
coughing
- Skin contact** : No specific data.
- Ingestion** : No specific data.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Long term exposure

- Potential immediate effects** : Not available.
- Potential delayed effects** : Not available.

Potential chronic health effects

Not available.

- General** : Repeated or prolonged inhalation of dust may lead to chronic respiratory irritation.
- Carcinogenicity** : No known significant effects or critical hazards.
- Mutagenicity** : No known significant effects or critical hazards.
- Reproductive toxicity** : No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

N/A

Section 12. Ecological information

Toxicity

Not available.

Persistence/degradability

Not available.

Bioaccumulative potential

Not available.

Mobility in soil

Soil/water partition coefficient (K_{oc}) : Not available.

Other adverse effects : No known significant effects or critical hazards.

Section 13. Disposal considerations

Disposal methods : The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Section 14. Transport information

	China	IMDG	IATA
UN number	Not regulated.	Not regulated.	Not regulated.
UN proper shipping name	-	-	-
Transport hazard class(es)	-	-	-
Packing group	-	-	-
Environmental hazards	No.	No.	No.

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Extinguishing media

Suitable extinguishing media : Use dry chemical powder.

Unsuitable extinguishing media : Avoid high pressure media which could cause the formation of a potentially explosible dust-air mixture.

Incompatible materials : Reactive or incompatible with the following materials:
oxidizing materials

Transport in bulk according to IMO instruments : Not available.

Section 15. Regulatory information

Inventory of Existing Chemical Substances in China (IECSC) : All intentional components are listed on the inventory, are exempted, or are supplier verified.

List of Goods banned for Importing

None of the components are listed.

List of Explosive Precursors

None of the components are listed.

List of Goods banned for Exporting

None of the components are listed.

List of Toxic Chemicals Severely Restricted for Importing & Exporting by China

None of the components are listed.

Inventory of Highly Toxic Articles

None of the components are listed.

Catalogue of Hazardous Chemicals of Priority Management

None of the components are listed.

Catalogue of Occupational Disease Hazard Factors - Dust

Ingredient name	Status
barium sulfate	Listed

Catalogue of Occupational Disease Hazard Factors - Chemical Factors

Ingredient name	Status
barium sulfate	Listed

Section 16. Other information

Product code : 188844

History

Date of printing : 28-2-2024

Date of issue/ Date of revision : 28-2-2024

Date of previous issue : 31-8-2023

Version : 2

Unique ID : D2A5A60AAB0B1EDEB5C44C5C0FA3501A

Key to abbreviations : ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
N/A = Not available
SGG = Segregation Group
UN = United Nations

Date of issue/Date of revision : 28-2-2024

Version : 2

Date of previous issue : 31-8-2023

9/10

Section 16. Other information

Procedure used to derive the classification

Classification	Justification
Not classified.	

Indicates information that has changed from previously issued version.

Notice to reader

FOR PROFESSIONAL USE ONLY

IMPORTANT NOTE The information in this data sheet is not intended to be exhaustive and is based on the present state of our knowledge and on current laws: any person using the product for any purpose other than that specifically recommended in the technical data sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at his own risk. It is always the responsibility of the user to take all necessary steps to fulfill the demands set out in the local rules and legislation. Always read the Material Data Sheet and the Technical Data Sheet for this product if available. All advice we give or any statement made about the product by us (whether in this data sheet or otherwise) is correct to the best of our knowledge but we have no control over the quality or the condition of the substrate or the many factors affecting the use and application of the product. Therefore, unless we specifically agree in writing otherwise, we do not accept any liability whatsoever for the performance of the product or for any loss or damage arising out of the use of the product. All products supplied and technical advice given are subject to our standard terms and conditions of sale. You should request a copy of this document and review it carefully. The information contained in this data sheet is subject to modification from time to time in the light of experience and our policy of continuous development. It is the user's responsibility to verify that this data sheet is current prior to using the product.

Brand names mentioned in this data sheet are trademarks of or are licensed to Akzo Nobel.